


MUNARI 8

Lutz PANKOW

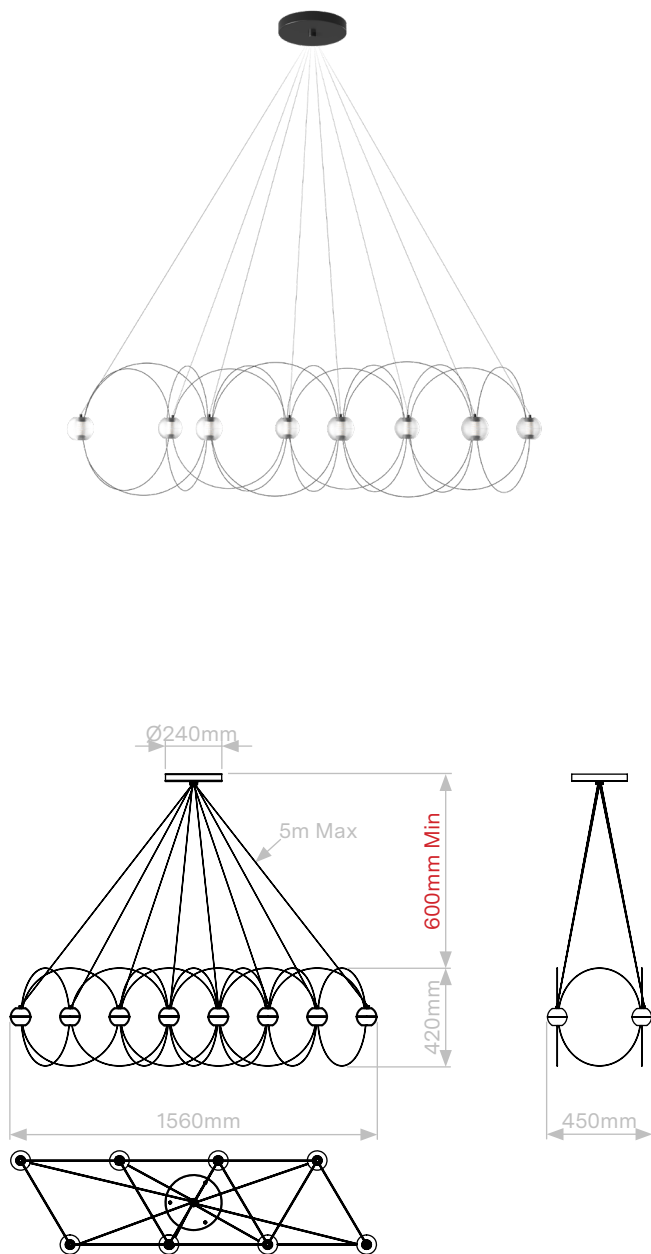

Finitions

Finishings



DCW Refs

DCW Refs

MUNARI 8 P 2400K BL
MUNARI 8 P 2400K BL PRE-ASSEMBLED
MUNARI 8 P 2400K GOL
MUNARI 8 P 2400K GOL PRE-ASSEMBLED
DALI CONVERTER
CASAMBI CONTROLLER CBU-TED

3700677662514
3700677662774
3700677662521
3700677662781
3700677662866
3700677662293

Typologie

Typology

Tension

Voltage

Indice de protection

Protection index

Classe

Class

Puissance

Power

Source Lumineuse

Light Source

Température de couleur

Color Temperature

Flux Lumineux

Light Flux

Driver

Driver

Gradation

Dimming

Câble

Cable

Matériaux

Materials

Poids Net

Net Weight

Poids Brut

Gross Weight

Emballage

Packaging

Marquages

Marks

EPREL

EPREL

Options

Options

Suspension

Pendant lamp

220-240 V

20

1

26 W

LED Intégrée

Integrated LED

2400 K

5120 Lm (valeur nominale)
5120 Lm (nominal value)

Intégré - CV - 24 V - 107×40×22 mm
Integrated - CV - 24 V - 107×40×22 mm

Oui - TRIAC

Yes - TRIAC

Noir - 5 m
Black - 5 m

Acier, polycarbonate, aluminium
Steel, polycarbonate, aluminum

3,2 Kg

4,9 Kg

981×289×87 mm



D (2163959)

DALI via convertisseur

DALI with converter

CASAMBI via contrôleur

CASAMBI with controller

